
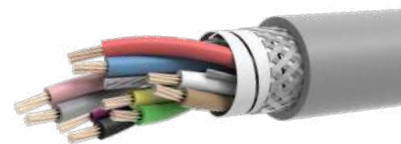


LONGFLEX® ROBOTIC FD 930 CP-TP



产品应用

特点

FT2

电缆结构

	IEC 60228 6
	TPE
	DIN 47100
	PUR
	RAL 7001

技术参数

	: -50 ~ -80	: -25 ~ -80
	/	2000V/min AC
	/	2000V/min AC
20	200M .km	
	300V	
	3D D=	
	5D D=	
	1000	

产品编码	产品规格 (mm ²)	电缆外径 (mm)	铜用量 (kg/km)	电缆净重 (kg/km)
ZL5930178	2× 2× 0.14	5.50	16.35	41.64
ZL5930179	3× 2× 0.14	5.80	20.19	48.55
ZL5930180	4× 2× 0.14	6.50	24.8	63.68
ZL5930181	5× 2× 0.14	7.30	15.21	60.14
ZL5930182	6× 2× 0.14	7.40	33.79	80.10
ZL5930183	2× 2× 0.25	6.60	22.31	57.62
ZL5930184	3× 2× 0.25	6.80	28.39	68.00
ZL5930185	4× 2× 0.25	7.30	35.53	82.97
ZL5930186	5× 2× 0.25	8.50	25.64	84.47
ZL5930187	6× 2× 0.25	8.70	49.3	110.57
ZL5930156	2× 2× 0.34	7.20	27.97	69.95

产品编码	产品规格 (mm ²)	电缆外径 (mm)	铜用量 (kg/km)	电缆净重 (kg/km)
ZL5930157	3× 2× 0.34	7.90	36.08	88.86
ZL5930158	4× 2× 0.34	8.40	45.54	108.03
ZL5930159	5× 2× 0.34	9.30	35.02	104.77
ZL5930160	6× 2× 0.34	9.60	63.69	137.26
ZL5930130	2× 2× 0.50	8.50	37.87	93.61
ZL5930148	3× 2× 0.50	8.90	49.77	113.28
ZL5930131	4× 2× 0.50	9.60	63.5	140.01
ZL5930135	2× 2× 0.75	9.90	52.12	124.8
ZL5930188	3× 2× 0.75	10.80	74.17	166.68
ZL5930136	4× 2× 0.75	11.70	94.51	207.89