


LONGFLEX® MC 411 CY

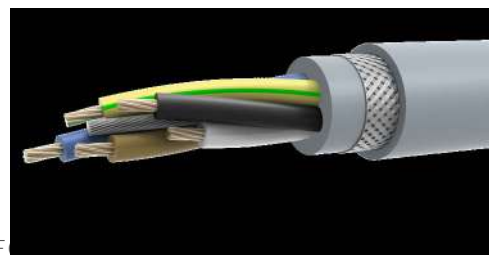

产品应用

特点

电缆结构

	IEC 60228 5
	PVC
	PVC
	PVC
	RAL7001

技术参数

	: -40 ~ -80	: -5 ~ -60
	2000V	
20	10M .km	
	300/500V	
	: 6D D=	
	12.5D D=	
	100~300	

产品编码	产品规格 (mm ²)	电缆外径 (mm)	铜用量 (kg/km)	电缆净重 (kg/km)
ZL5411176	2× 0.5	6.9	25.48	75.00
ZL5411177	3G0.5	7.1	31.38	82.66
ZL5411179	4G0.5	8	37.88	104.12
ZL5411181	5G0.5	8.7	43.81	121.54
ZL5411183	7G0.5	9.5	57.78	144.62
ZL5411185	8G0.5	11.60	91.01	222.58
ZL5411187	18G0.5	13.30	135.76	305.08
ZL5411188	25G0.5	15.60	182.88	406.75
ZL5411191	2× 0.75	7.70	28.83	97.26
ZL5411192	3G0.75	8.00	37.07	108.75
ZL5411194	4G0.75	8.50	46.19	125.58
ZL5411196	5G0.75	9.20	55.73	141.31
ZL5411198	7G0.75	10.2	77.26	169.75
ZL5411200	12G0.75	12.60	124.85	273.49
ZL5411202	18G0.75	14.60	186.54	385.33
ZL5411204	25G0.75	17.10	254.78	511.73
ZL5411208	2× 1	8.00	34.66	108.42
ZL5411209	3G1	8.30	45.44	122.49
ZL5411211	4G1	8.90	57.24	142.64
ZL5411213	5G1	9.70	69.4	160.93
ZL5411214	7G1	10.8	96.14	197.36
ZL5411215	12G1	13.30	166.87	327.23
ZL5411216	16G1	14.80	213.12	411.42
ZL5411217	18G1	15.40	236.48	450.06

产品编码	产品规格 (mm ²)	电缆外径 (mm)	铜用量 (kg/km)	电缆净重 (kg/km)
ZL5411218	25G1	18.60	345.79	637.61
ZL5411222	2× 1.5	8.50	45.18	127.28
ZL5411223	3G1.5	8.90	60.66	146.06
ZL5411225	4G1.5	9.50	77.39	172.14
ZL5411227	5G1.5	10.40	98.79	199.97
ZL5411229	7G1.5	11.8	130.35	247.10
ZL5411231	12G1.5	14.60	228.8	416.63
ZL5411232	18G1.5	16.60	328.12	564.42
ZL5411233	25G1.5	20.00	476.57	799.47
ZL5411237	2× 2.5	9.90	72.23	181.76
ZL5411238	3G2.5	10.30	97.88	211.63
ZL5411239	4G2.5	11.40	125.54	261.03
ZL5411240	5G2.5	12.60	153.36	298.65
ZL5411241	7G2.5	14.2	205.02	368.49
ZL5411242	12G2.5	17.80	362.28	635.18
ZL5411243	2× 4	11.50	106.13	253.46
ZL5411244	4G4	13.80	199.08	393.37
ZL5411245	5G4	15.00	243.47	445.4
ZL5411246	2× 6	13.90	159.08	374.24
ZL5411247	4G6	15.70	285.69	533.5
ZL5411248	5G6	17.40	351.5	613.69
ZL5411250	2× 10	16.30	249.99	543.92
ZL5411251	3G10	17.40	353.2	662.61
ZL5411252	4G10	19.40	483.56	851.14