


LONGFLEX® MC 712 CP



产品应用

特点

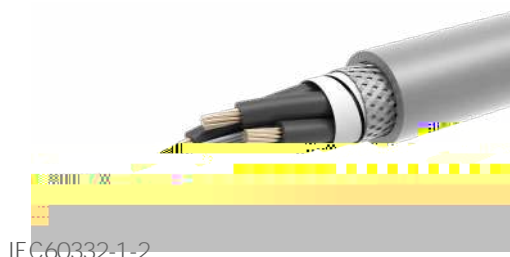

IEC60332-1-2

电缆结构

	IEC 60228 5
	PVC
	DIN VDE 0293,
	PUR
	RAL 7001

技术参数

		-40 ~ -80		-5 ~ -60
				2000V
20				10M .km
				300/500V
				: 6D D=
				12.5D D=
				100-300

产品编码	产品规格 (mm ²)	电缆外径 (mm)	铜用量 (kg/km)	电缆净重 (kg/km)
ZL5712001	2× 0.5	6.00	20.25	50.56
ZL5712002	3G0.5	6.20	25.94	59.81
ZL5712004	4G0.5	6.70	32.34	71.42
ZL5712006	5G0.5	7.4	34.5	76.4
ZL5712008	7G0.5	8.8	52.3	105.0
ZL5712010	12G0.5	10.40	87.98	179.32
ZL5712012	18G0.5	12.30	124.01	254
ZL5712014	25G0.5	14.2	161.2	300.2
ZL5712016	2× 0.75	6.40	26.31	59.8
ZL5712017	3G0.75	6.70	34.55	72.01
ZL5712019	4G0.75	7.60	43.66	94.28
ZL5712021	5G0.75	8.30	53.21	113.52
ZL5712023	7G0.75	9.7	71.5	133.6
ZL5712025	12G0.75	11.60	121.82	231.08
ZL5712026	18G0.75	13.40	182.75	328.63
ZL5712027	25G0.75	16.00	250.15	446.72
ZL5712029	2× 1	6.8	32.8	66.9
ZL5712030	3G1	7.2	46.7	84.1
ZL5712032	4G1	7.6	54.8	94.0
ZL5712034	5G1	8.6	66.7	119.6
ZL5712036	7G1	10.4	89.8	157.4

产品编码	产品规格 (mm ²)	电缆外径 (mm)	铜用量 (kg/km)	电缆净重 (kg/km)
ZL5712038	12G1	12.1	149.3	248.1
ZL5712039	18G1	14	214.3	342.0
ZL5712040	25G1	16.6	302.4	468.2
ZL5712041	2× 1.5	7.60	42.66	89.8
ZL5712042	3G1.5	8.00	58.13	110.26
ZL5712044	4G1.5	8.60	74.87	134.79
ZL5712046	5G1.5	9.40	91.86	163.43
ZL5712048	7G1.5	11.2	123.3	196.2
ZL5712050	12G1.5	13.40	225.01	358.92
ZL5712051	18G1.5	15.4	311.7	452.3
ZL5712052	25G1.5	18.4	423.3	613.4
ZL5712054	3G2.5	9.1	91.8	145.2
ZL5712055	4G2.5	10	122.5	188.3
ZL5712056	5G2.5	11.5	149.5	234.1
ZL5712057	7G2.5	13.7	203.0	306.9
ZL5712058	12G2.5	16.2	342.6	494.6
ZL5712059	18G2.5	19	496.3	700.9
ZL5712060	25G2.5	22.8	679.7	957.9
ZL5712061	4G4	12.10	187.43	296.92
ZL5712063	4G6	14.50	281.9	436.83
ZL5712065	4G10	17.70	457.28	679.78