
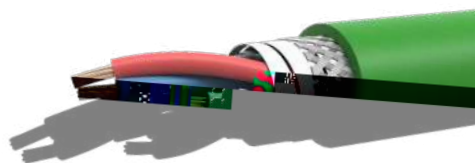


LONGFLEX® SERVO FD 340 CP



产品应用

特点

IEC60332-1-2

电缆结构

	IEC 60228 6
	PP
	PUR
	RAL6018

技术参数

	: -40 -80	: -20 -60
	500V/min AC	
20	200M .km	
	30V	
	: 4D D=	
	7.5D D=	
	500	1000

产品编码	产品规格 (mm ²)	电缆外径 (mm)	铜用量 (kg/km)	电缆净重 (kg/km)
ZL5340001	(12X0.22)	6.9	48.0	76
ZL5340002	(2X2X0.18)	5.0	23.1	36
ZL5340003	(4X2X0.18)	6.4	34.2	53
ZL5340004	(8X2X0.18)	7.8	54.0	85
ZL5340005	(2X2X0.15+2X0.38)	6.9	39.0	67
ZL5340006	(4X2X0.14+4X0.5)	7.5	48.0	83

产品编码	产品规格 (mm ²)	电缆外径 (mm)	铜用量 (kg/km)	电缆净重 (kg/km)
ZL5340007	(4X2X0.34+4X0.5)	8.9	77.0	120
ZL5340008	(5X2X0.14+2X0.5)	7.8	41.0	82
ZL5340009	(3X2X0.25+2X0.5)	8.4	44.0	95
ZL5340010	(3X(2X0.14)+2X(0.5))	8.9	69.0	113
ZL5340011	(3X(2X0.14)+4X0.14+2X0.5)	8.8	66.0	101
ZL5340012	(3X(2X0.14)+4X0.14+4X0.22+2X0.5)	9.4	86.0	139