
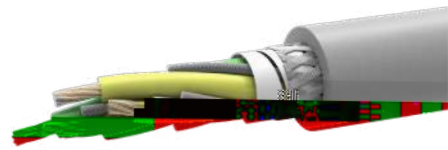


LONGFLEX® CHAIN FD 431 CY



产品应用

特点

IEC60332-1-2

电缆结构

	IEC 60228 6
	PVC
	DIN 47100
	PVC
	RAL 7001

技术参数

	: -40 ~-80	: -5 ~-60
	500V/min AC	
20	10M .km	
	30V	
	: 4D D=	
	7.5D D=	
	300	800

		(mm)	(kg/km)	(kg/km)
ZL5431025	2× 26AWG	4.40	10.06	30.81
ZL5431026	3× 26AWG	4.60	12.00	34.23
ZL5431027	4× 26AWG	4.80	14.31	38.82
ZL5431028	10× 26AWG	6.50	28.55	70.26
ZL5431029	20× 26AWG	8.20	48.49	115.24
ZL5431031	2× 24AWG	4.70	12.08	35.30
ZL5431032	3× 24AWG	4.90	14.64	39.69
ZL5431033	4× 24AWG	5.20	17.63	45.49

		(mm)	(kg/km)	(kg/km)
ZL5431034	10× 24AWG	7.10	36.11	84.67
ZL5431035	20× 24AWG	9.00	62.56	141.13
ZL5431037	2× 22AWG	5.00	15.39	40.96
ZL5431038	3× 22AWG	5.20	19.20	46.86
ZL5431039	4× 22AWG	5.50	23.54	54.45
ZL5431040	10× 22AWG	8.20	50.40	113.93
ZL5431041	20× 22AWG	10.10	94.85	189.05