


LONGFLEX® MC 411

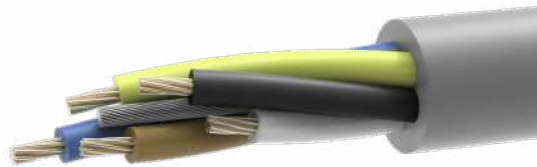

产品应用

特点

IEC60332-1-2

电缆结构

	IEC 60228 5	
	PVC	
	0.5mm ²	DIN 47100
	0.5mm ²	
	PVC	

技术参数

		: -40 ~-80	: -5 ~-60
		2000V	
	20	10M .km	
		300/500V	
		: 6D D=	
		12.5D D=	
		100-300	

产品编码	产品规格 (mm ²)	护套颜色	电缆外径 (mm)	铜用量 (kg/km)	电缆净重 (kg/km)
ZL5411331	2× 0.3		4.5	5.47	29.42
ZL5411332	3× 0.3		4.7	8.20	32.12
ZL5411333	4× 0.3		5.40	11.16	45.86
ZL5411334	5× 0.3		5.6	13.67	48.26
ZL5411335	7× 0.3		6.7	19.14	64.30
ZL5411336	8× 0.3		6.70	23.18	69.15
ZL5411337	10× 0.3		8.00	28.98	92.01
ZL5411338	12× 0.3		8.20	34.77	102.64
ZL5411001	2× 0.5		5.40	9.87	43.51
ZL5411002	3G0.5		5.60	14.81	50.93
ZL5411004	4G0.5		6.1	19.53	58.87
ZL5411006	5G0.5		6.80	24.91	71.69
ZL5411008	7G0.5		7.8	34.18	92.48
ZL5411010	8G0.5		7.8	39.06	98.16
ZL5411011	10G0.5		9.1	48.83	123.36
ZL5411012	12G0.5		9.60	62.09	152.06
ZL5411013	14G0.5		10.10	72.44	171.2
ZL5411014	16G0.5		11.1	78.12	183.26
ZL5411015	18G0.5		11.30	93.14	216.87
ZL5411016	21G0.5		11.90	110.68	246.32
ZL5411018	25G0.5		13.8	122.06	283.36
ZL5411024	2× 0.75		5.80	14.81	52.89
ZL5411025	3G0.75		6.10	22.21	62.93
ZL5411027	4G0.75		6.5	29.30	71.97
ZL5411029	5G0.75		7.1	36.62	87.68
ZL5411031	6G0.75		7.8	43.94	104.50
ZL5411032	7G0.75		8.8	51.27	123.71

产品编码	产品规格 (mm ²)	护套颜色	电缆外径 (mm)	铜用量 (kg/km)	电缆净重 (kg/km)
ZL5411034	8G0.75		8.80	62.09	137.74
ZL5411036	10G0.75		10.20	77.62	170.75
ZL5411037	12G0.75		10.70	93.14	199.3
ZL5411041	16G0.75		11.70	124.19	251.58
ZL5411042	18G0.75		12.40	139.71	281.77
ZL5411043	21G0.75		13.00	166.02	321.54
ZL5411044	25G0.75		15.10	197.64	395.95
ZL5411051	2× 1		6.10	19.74	61.44
ZL5411052	3G1		6.3	29.30	68.36
ZL5411054	4G1		6.9	39.06	85.52
ZL5411056	5G1		8.10	49.83	113.42
ZL5411058	6G1		8.70	60.37	132.74
ZL5411059	7G1		9.3	68.36	146.14
ZL5411061	8G1		9.30	82.79	164.44
ZL5411063	10G1		11.00	103.49	209.76
ZL5411064	12G1		11.30	124.19	238.93
ZL5411066	14G1		11.90	144.89	270.69
ZL5411067	16G1		12.60	165.59	306.52
ZL5411068	18G1		13.20	186.28	340.01
ZL5411070	20G1		13.60	210.82	372.05
ZL5411072	25G1		16.10	263.52	478.01
ZL5411080	2× 1.5		6.60	28.92	76.3
ZL5411081	3G1.5		6.9	42.91	87.91
ZL5411083	4G1.5		7.5	57.22	110.31
ZL5411086	5G1.5		8.6	71.52	142.30
ZL5411087	6G1.5		9.3	85.83	164.84
ZL5411088	7G1.5		10.1	100.13	186.52

产品编码	产品规格 (mm ²)	护套颜色	电缆外径 (mm)	铜用量 (kg/km)	电缆净重 (kg/km)	产品编码	产品规格 (mm ²)	护套颜色	电缆外径 (mm)	铜用量 (kg/km)	电缆净重 (kg/km)
ZL5411090	8G1.5		10.10	121.28	212.18	ZL5411126	4G6		13.40	235.44	406.74
ZL5411093	10G1.5		12.00	151.6	270.23	ZL5411127	5G6		15.10	294.3	485.03
ZL5411095	12G1.5		12.40	181.92	313.01	ZL5411129	3G10		15.10	296.1	513.56
ZL5411097	14G1.5		13.10	212.24	355.87	ZL5411130	4G10		16.70	398.63	656.4
ZL5411098	16G1.5		14.10	242.56	413.74	ZL5411300	2× 0.3		4.5	5.47	29.42
ZL5411099	18G1.5		14.80	272.88	459.22	ZL5411287	3× 0.3		4.7	8.20	32.12
ZL5411100	21G1.5		15.50	324.25	527.13	ZL5411316	4× 0.3		5.1	10.94	39.33
ZL5411101	25G1.5		17.90	386.02	643.16	ZL5411293	5× 0.3		5.6	13.67	48.26
ZL5411108	2× 2.5		8.20	48.19	121.89	ZL5411288	2× 0.5		5.2	9.77	41.53
ZL5411109	3G2.5		8.6	71.52	140.29	ZL5411304	3× 0.5		5.6	14.65	47.69
ZL5411110	4G2.5		9.2	95.36	171.66	ZL5411289	4G0.5		6.1	19.53	58.87
ZL5411111	5G2.5		10.70	121.65	224.49	ZL5411299	4× 0.5		6.1	19.53	58.87
ZL5411112	7G2.5		12.5	166.88	294.36	ZL5411312	6× 0.5		7.3	29.30	85.40
ZL5411113	12G2.5		15.50	303.2	502.72	ZL5411305	8× 0.5		7.8	39.06	98.16
ZL5411114	14G2.5		16.30	353.73	572.85	ZL5411303	10× 0.5		9.1	48.83	123.36
ZL5411115	18G2.5		18.50	454.8	736.15	ZL5411308	12× 0.5		9.6	58.59	140.54
ZL5411116	25G2.5		22.10	643.36	1017.73	ZL5411298	4× 0.75		6.5	29.30	71.97
ZL5411119	3G4		10.10	116.59	217.06	ZL5411306	4G1		6.9	39.06	85.52
ZL5411120	4G4		11.4	153.80	243.38	ZL5411290	3× 1.5		6.9	42.91	87.91
ZL5411121	5G4		12.50	196.2	329.95	ZL5411296	4G1.5		7.5	57.22	110.31
ZL5411125	3G6		12.2	173.02	276.62	ZL5411297	4G2.5		9.2	95.36	171.66