
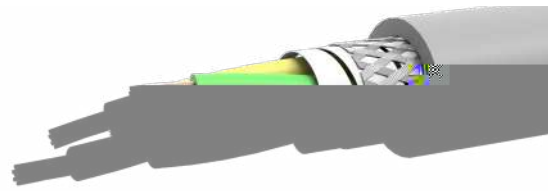


LONGFLEX®MC 416 CY



IEC60332-1-2

	IEC 60228 5
	PVC
	0.5mm ² DIN 47100 0.5mm ²
	PVC


		-40 ~-80	-5 ~-60
	20	10M .km	2000V
			300/500V
		: 6D D=	
		12.5D D=	
		100-300	

产品编码	产品规格 (mm ²)	护套颜色	电缆外径 (mm)	铜用量 (kg/km)	电缆净重 (kg/km)
ZL5416030	2× 0.3		5.1	12.25	35.73
ZL5416014	3× 0.3		5.3	15.05	38.32
ZL5416037	4× 0.3		6.00	17.78	52.45
ZL5416006	5× 0.3		6.1	22.03	53.01
ZL5416063	7× 0.3		7.2	29.15	71.84
ZL5416005	8× 0.3		7.2	31.99	76.32
ZL5416029	10× 0.3		8.3	39.36	94.92
ZL5416064	12× 0.3		9	48.11	116.62
ZL5416036	14× 0.3		8.6	53.77	112.65
ZL5416013	16× 0.3		9.2	60.07	126.56
ZL5416065	2× 0.5		6.20	16.71	51.1
ZL5416066	3G0.5		6.2	23.06	56.34
ZL5416067	4G0.5		6.8	30.42	66.99
ZL5416068	5G0.5		7.4	36.84	80.98
ZL5416069	7G0.5		8.50	45.63	116.75
ZL5416070	12G0.5		10.5	76.58	164.27
ZL5416071	18G0.5		12.50	113.49	257.43
ZL5416072	25G0.5		14.90	162.96	357
ZL5416073	2× 0.75		6.60	22.39	60.21
ZL5416074	3G0.75		6.90	30.34	72.32
ZL5416075	4G0.75		7.2	41.84	80.26
ZL5416076	5G0.75		8.50	47.81	116.6
ZL5416077	7G0.75		9.10	64.34	142.83

产品编码	产品规格 (mm ²)	护套颜色	电缆外径 (mm)	铜用量 (kg/km)	电缆净重 (kg/km)
ZL5416078	12G0.75		11.80	112.05	234.09
ZL5416079	18G0.75		13.60	168.09	329.24
ZL5416080	25G0.75		16.20	232.25	448.37
ZL5416081	2× 1		6.90	27.91	68.44
ZL5416082	3G1		7.2	39.23	81.68
ZL5416083	4G1		7.6	49.71	93.14
ZL5416084	5G1		9.00	61.07	134.75
ZL5416085	7G1		9.60	82.84	166.93
ZL5416086	12G1		12.50	144.57	278.75
ZL5416087	18G1		14.70	216.88	401.2
ZL5416088	25G1		17.20	300.86	533.53
ZL5416089	2× 1.5		7.3	38.76	78.66
ZL5416090	3G1.5		7.6	53.64	97.75
ZL5416091	4G1.5		8.4	71.47	124.47
ZL5416092	5G1.5		9.60	85.43	166.64
ZL5416093	7G1.5		11	115.60	196.85
ZL5416094	12G1.5		13.60	210.32	359.53
ZL5416095	18G1.5		15.5	286.77	441.41
ZL5416096	25G1.5		18.5	392.65	600.80
ZL5416097	3G2.5		9.3	87.75	148.68
ZL5416098	4G2.5		10.1	113.02	186.25
ZL5416099	5G2.5		11.80	140.56	258.14
ZL5416100	7G2.5		13.2	190.98	297.77

产品编码	产品规格 (mm ²)	护套颜色	电缆外径 (mm)	铜用量 (kg/km)	电缆净重 (kg/km)
ZL5416101	12G2.5		16.2	316.26	483.33
ZL5416102	18G2.5		19.1	464.94	692.93
ZL5416103	25G2.5		23	640.38	953.73
ZL5416104	4G4		12	175.53	274.45
ZL5416106	4G6		14.2	328.41	389.18
ZL5416108	4G10		17.6	423.78	611.66
ZL5416031	2× 0.5		5.9	17.24	46.54
ZL5416021	4× 0.5		6.8	30.42	66.99
ZL5416049	4× 0.5		6.8	30.42	66.99

产品编码	产品规格 (mm ²)	护套颜色	电缆外径 (mm)	铜用量 (kg/km)	电缆净重 (kg/km)
ZL5416015	6× 0.5		7.9	42.67	91.69
ZL5416035	8× 0.5		8.5	65.96	111.20
ZL5416019	4× 0.75		7.2	41.84	80.26
ZL5416052	4× 0.75		7.2	41.84	80.26
ZL5416020	3× 1		7.2	39.23	81.68
ZL5416003	4G1		7.6	49.71	93.14
ZL5416012	4G1.5		8.4	71.47	124.47
ZL5416007	4G2.5		10.1	113.02	186.25



	IEC 60228/VDE 0295 6
	PVC
	DIN 47100
	PVC

		: -40 ~80		: -5 ~60
		2000V		
	20	10M .km		
		300/500V		

产品编码	产品规格 (mm ²)	电缆外径 (mm)	铜用量 (kg/km)	电缆净重 (kg/km)
ZL5416022	2x2x0.3	6.8	21.55	55.51
ZL5416001	3x2x0.3	7.5	27.88	72.54
ZL5416109	4x2x0.3	8.5	34.96	93.28